



此画册仅供参考，具体参数请以实物为准，
本公司对数据保留最终解释权，
数据如有变动恕不另行通知。

This album is only for reference,
specific parameters please in kind
prevail, our company reserves the
right of data, data are subject to
change without prior notice.



技术创造精品 质量决定信誉

www.gaodachina.com

反击式破碎机

Impact Crusher

上海高达机器有限公司
Shanghai golden machinery Co., LTD.

上海市浦东新区合庆凌白公路1280号
No.1280 Ling Bai Road, He Qing Town,
Pu Dong New District, Shanghai, China

国际市场部: 021-58559008 传真: 021-58550566

碎石制砂部: 021-38921328 传真: 021-38860218

磨粉机部: 021-38921518 传真: 021-38860218

售后服务部: 021-58550968

邮箱: golden@gaodachina.com

邮编: 201210





反击式破碎机 Impact Crusher

反击式破碎机概述：

反击式破碎机能处理粒度不大于500毫米，抗压强度不超过360mpa的各种物料。它具有破碎比大，高效率的破碎，易于维护等特点。产品呈立方体，是高速公路面及水电建设用骨料的理想加工设备。反击式破碎机以优异的性能和良好的表现而在高速公路建设、水利工程和建筑用碎石加工等领域广泛应用。反击式破碎机对花岗岩、石灰石、河卵石等有更好的适用性。

Impact crusher is used in crushing all kinds of materials whose fineness is below 500mm, and the pressure resistance around 360mpa. It has the features of big crushing rate, efficient crushing, easy maintenance and cubic shape with final product. It is an ideal mining equipment for high road and water conservancy. With perfect features and good performance, impact crusher is widely used in high road construction, water conservancy and construction process of gravel and so on. It has a better accability in granite, limestone and cobble, etc.

反击式破碎机性能特点：

高铬板锤、耐磨反击衬板；独特的齿式反击衬板；反击式破碎机尤其适用于硬岩破碎、高效节能；产品形状呈立方体，排料粒度大小可调，简化破碎流程。


Impact plate with a special shape, wear-resistant liner plate, specially in hard mining crush, high efficiency and reduction ratio. the final production is cubic shape, required adjustment the output feed fineness, simplifying the process of the crushing.

反击式破碎机结构特点

1. 进料口大、破碎腔高、适应物料硬度高，块度大、产品石粉少；
2. 反击板与板锤间隙能方便调节，有效控制出料粒度，颗粒形状好；
3. 结构紧凑、机器刚性强、转子具有大的转动惯量；
4. 高铬板锤，抗冲击、抗磨损、冲击力大；
5. 无键连接，检修方便，经济可靠；
6. 破碎功能全、生产率高、机件磨损小、综合效益高。

Structure features

1. Big output opening, high crushing cavity, suitable in high hardness, big pieces and less power ;
2. The gap in the impact and the hammer plate can be adjusted, efficient control the output feed fineness, the final production has good shape;
3. Tight structure, good equipment rigidity, big rotational inertia;
4. High hammer plate, big impact resistance and wear resistance.;
5. No-board connection, easy maintenance and reliable operation;
6. Full-featured, high-efficiency, small dentel wear and high overall efficiency.

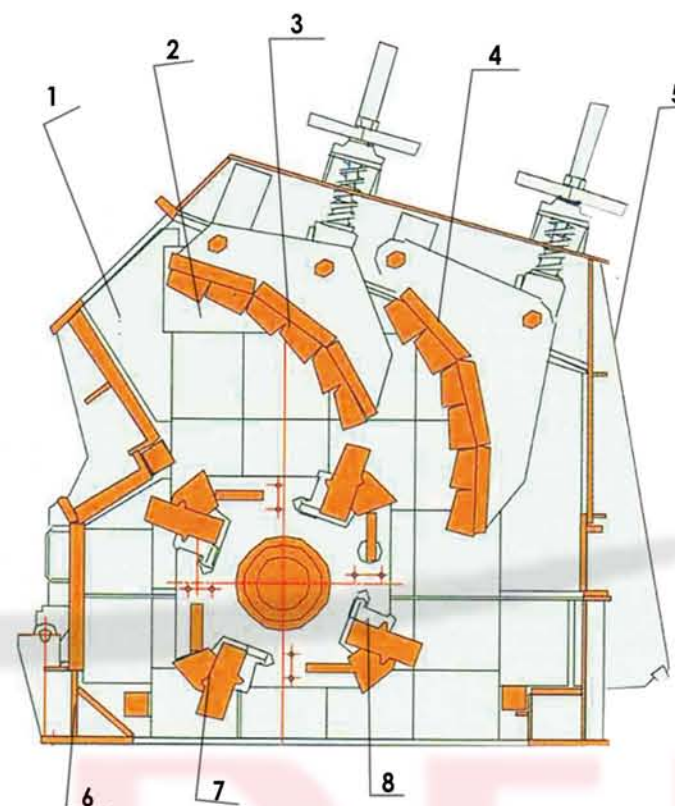

结构图

structure

- | | |
|---------|-----------------|
| 1. 进料口 | 1. Feed Opening |
| 2. 衬板 | 2. Scale Board |
| 3. 反击架 | 3. Impact Rack |
| 4. 反击衬板 | 4. Impact Plate |
| 5. 后箱体 | 5. Rear Case |
| 6. 底座 | 6. Chassis |
| 7. 板锤 | 7. Blow Bar |
| 8. 转子 | 8. Rotar |

主要技术参数 main technical parameters

型号	转子规格 (mm)	进料口 尺寸 (mm)	最大进料 边长 (mm)	产量 (t/h)	电机功率 (kw)	外形尺寸 (mm)	重量 (t)
Model	Roller size (mm)	Output size (mm)	Max feed side length (mm)	Capacity (t/h)	Motorpower (kw)	Overall dimensions (L×W×H) (mm)	Weight (t)
PF-1007	@1000×700	400×700	300	37-45	55	2400×1558×2660	9.5
PF-1010	@1000×1050	400×1080	350	50-80	75	2400×2250×2660	12.2
PF-1210	@1250×1050	400×1080	350	70-120	110	2690×2338×2890	14.1
PF-1214	@1250×1400	400×1080	350	80-180	132	2690×2688×2890	18.6
PF-1315	@1300×1500	860×1520	500	150-220	200	2860×2800×3050	24
PF-1316	@1320×1600	1690×860	500	170-280	200	3096×2850×3050	25.5

注：技术参数如有变动，恕不另行通知。 Note: technical parameters such as are subject to change without notice.

反击式破碎机 Impact Crusher





售后服务 After-sales service

- 1、保证为用户提供良好的售前、售后服务，为用户在订购前介绍产品性能及使用要求，提供有关资料，当好用户参谋。
- 2、用户需求进行技术培训，对重点用户进行质量跟踪、用户访问，及时根据用户需求改进产品性能，不断提高产品质量。
- 3、保证兑现产品“三包”，产品在“三包”期内确属产品质量问题，严格履行合同中规定的赔偿责任。
- 4、超过“三包”期限的产品，保证提供维修配件并根据用户需求做好维修服务工作。
- 5、对于产品的配件和易损件以出厂价优惠提供。
- 6、接到用户要求解决产品在使用中出现的问题通知后，本公司在1小时内作出初步响应，重大问题24小时到达现场。
- 7、需要技术服务的将派专业技术服务人员参加开箱验收和指导安装、调试工作，直到设备正常运转。如有必要公司免费为客户培训技术人员，让客户掌握设备的使用、维护和简单修理技术。在生产过程中一旦设备出现故障，公司在接到客户电话后的24小时内必须拿出明确的解决方案，并将以先恢复生产再追究责任的态度迅速解决问题。

- 1.Ensure to provide good pre-sale or after-sale service, the recommendation, operating requirements and other information of our productions for all of our clients before orders, as a good adviser.
- 2.Offer technology training for the clients' requirements, quality scout service for the emphases clients, interview, improving production features and continuous improving production quality.
- 3.Ensure to check production "three guarantees", if our production have quality issues during the times. we will strict to check the contract compensation liability.
- 4.Outlast the times we will offer maintenance service on the clients' requirements, and offer the maintenance parts in time.
- 5.Offer the parts and the quick-wear parts according to the factory favourable price.
- 6.We will response the clients who have the operating issues in the operating process in an hour, specially important issues we will rush to the scene during 24 hours.
- 7.Offer the specialty technology workers to check and guide setting, debugging, till the equipment do normal running. even we can offer free technology training for the clients' requiements in necessary, let our clients in control of the using, maintenance and easy repair technology, while clients have issues in the operating process we will make the specific plan in 24 hours and resolve the issues with a responsible attitude